

# IES5024-2F

22-port 10/100Base-T(x) + 2-port 100Base-FX (SC/ST/FC)

Managed Industrial Ethernet Switch

## Features

- Support IEEE802.3, IEEE802.3u, IEEE 802.3x, IEEE802.1Q, IEEE802.1p, IEEE802.1D, IEEE802.1W
- SW-Ring ring network patent technology (Fault recovery time<20ms)
- Support RSTP, way exchange time<50ms
- Support static multicast, IGMP Snooping and GMRP
- Support Port based VLAN and IEEE 802.1Q VLAN
- Support QOS absolutely and opposite priority
- Support rate control, Broadcast storm control
- Support WEB, SNMP and Telnet configuration
- Support MAC address learning, aging automatic
- Support DHCP server and port frame statistics
- Support email warning and relay warning
- Support port status display, data update.
- Support configuration file up and download
- Support 1 channel relay alarm output
- Industrial grade 4 design, -40-75℃work temperature
- IP30 protection grade, 19-inch rack mounting
- No fan deign



## Introduction

IES5024-2F is an industrial grade, managed and redundancy Ethernet switch which supports 22 Ethernet Ports and 2 Fiber ports. It provided some kinds of advanced network managed function, like as: SW-Ring redundancy ring network, VLAN, Trunking, Quality of Service, Speed control, port mirroring, fault alarm and firmware upgrade online. SW-Ring can bring your Ethernet to intelligent redundancy. Standard Industry design, can satisfied every requirement of the industry scene. All components used industry grade, it takes products high reliability. It provided wide voltage power supply input.

Product complies with FCC and CE standards, in line with the industrial design requirements, for intelligent substation construction provides high-performance, high-quality products guaranteed. Support 1 channel power inputs and 1 relay alarm output, wide temperature range of -40~75℃ to be able to meet the requirements of all kinds of industrial field, can be widely used in electric power, water conservancy, transportation, and other fields.

## Specification

### Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.1Q, IEEE802.1p, IEEE802.1D, IEEE802.1W  
 Protocol: ARP, ICMP, TCP, DHCP, DNS, HTTP, Telnet, SW-Ring, RSTP, SNMP

Flow control: IEEE802.3x flow control, back press flow control

### Function

Switch function: SW-Ring, QOS, 802.1QVLAN, RSTP, SNMP, Port trunking, static multicast filter, port mirroring, bandwidth management, broadcast storm control, port flow statistics,

upgrade online, up and download configuration file, user name access system

SW-Ring: Support Single, Couple, Chain, Dual homing

### Exchange attribute

100M forward speed: 148810pps

100M maximum filter speed: 148810pps

Transmit mode: store and forward

Switching fabric capacity: 12.8Gbps

MAC address table: 8K

Memory: 3Mbit

**Interface**

Electric port: 10Base-T/100Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect

100M optic fiber port: 100Base-FX, SC/ST/FC connector, support single mode (20/40/60/80Km optional), multi mode (2Km), wavelength: 1310nm, 1550nm

Console port: debug serial port carry out CLI command

Alarm port: 2 bit terminal block  
1 channel relay alarm output

**Transfer distance**

Twisted cable: 100M (standard CAT5/CAT5e cable)

Multi-mode: 1310nm, 2Km

Single-mode: 1310nm, 20/40/60Km  
1550nm, 80/100/120Km

**LED indicator**

Run indicator: Run

Interface indicator: Link (1~24)

Power supply indicator: PWR

Alarm indicator: Alarm

**Power supply**

Input Voltage: 100~240VAC/DC

Type of input: 3 bits terminal block

Overload current protect: 1.2A

**Consumption**

No-load consumption: 8.7W

Full-load consumption: 11.4W

**Working environment**

Working temperature: -40~75°C

Storage temperature: -40~85°C

Relative Humidity: 5%~95 % (no condensation)

**Mechanical Structure**

Shell: IP30 protect grade, metal shell

Installation: 19" 1U rack

Size (W×H×D): 441.6mm×45mm×208.9mm

**Industry Standard**

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 4

EN61000-4-3 (RS), Level 3

EN61000-4-4 (EFT), Level 4

EN61000-4-5 (Surge), Level 4

EN61000-4-6 (CS), Level 3

EN61000-4-8, Level 5

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6


**Certification**

CE, FCC, RoHS, UL508 (Pending)

**Warranty: 5 years**

**Dimension**

Unit (mm)

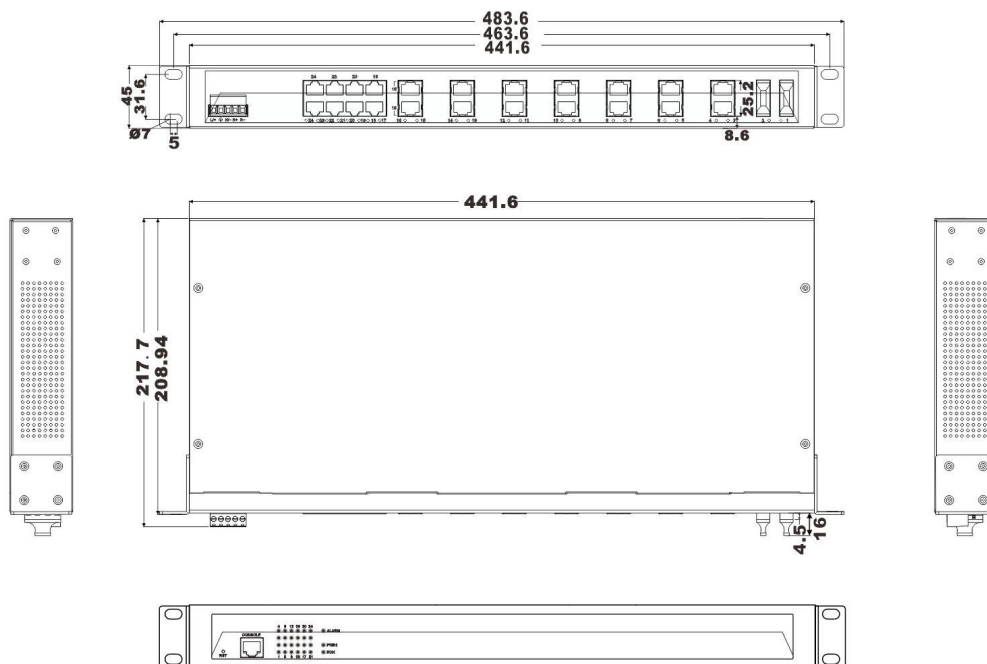

## Ordering Information

---

IES5024-2F (M): 22 port 10/100Base-T(X) + 2 port 100Base-FX Multi-mode SC/ST/FC, 100-240VAC/DC

IES5024-2F (S): 22 port 10/100Base-T(X) + 2 port 100Base-FX Single-mode SC/ST/FC, 100-240VAC/DC

IES5024-2F (SS): 22 port 10/100Base-T(X) + 2 port 100Base-FX single-mode, single fiber SC/ST/FC, 100-240VAC/DC

## Packing List

---

1. Ethernet switch IES5024-2F (plus terminal block) ×1
2. CD × 1
3. User manual × 1
4. Certificate of quality × 1
5. Warranty card × 1
6. Power cable × 1
7. Rackmount ears × 2